

# Discount Water Tanks

## 800-599-5644

- FDA approved High Density Linear Polyethylene (ANSI/NSF Standard 61).
- Impact and corrosion resistant.
- Seamless, one piece construction.
- Green opaque tanks blend with the environment, provide additional protection from UV rays, and reduce algae growth.
- Designed for containment of water (8.5 lbs./gal.).
- A concrete pad is recommended for installation. However, tanks may be placed on any flat level “compacted” surface.
- Tanks come with a standard 1-1/2” spin weld fill (#02017) and 2” Polypropylene discharge adapter (#93200). An optional 4” fire adapter, anti-vortex assemblies, and 3” water tank vents are available.
- Compliant with Local, State, and National standards for Fire Protection.



Item#	Size (Gal.)	Dia. (In.)	Ht. w/Lid (In.)	Lid (In.)
76330	330	47	53	8
76331	450	48	66	16
76335	550	47	78	16
76340	600	72	42	16
76350	1000	72	66	16
76351	1300	72	83	16
76360	1500	72	94	16
76386	2500	96	92	16

Item#	Size (Gal.)	Dia. (In.)	Ht. w/Lid (In.)	Lid (In.)
76388*	2800	102	85	24
76390	3000	96	108	16
76396*	3850	102	114	24
76406*	4300	102	127	24
76400*	4500	118	102	22
76407	4995	142	86	22
76408*	5200	102	155	24
76410*	6500	118	142	22

\*Molded-in lifting lugs available upon request.

**Limited Tank Warranty:** RMI warrants to the original purchaser all tanks manufactured by RMI to be free from defects in material and workmanship for a period of five (5) years from date of manufacture, with the exception of D.O.T. and Septic Tanks, which have a special warranty. The Guido Tanks also have a five (5) year warranty. **Review the chemical resistance guide and warranty instruction information prior to the installation and use of RMI Tanks. Hard-plumbing of tank is not recommended due to the expansive/contractive characteristics of Polyethylene. All weights, dimensions, and gallonage markers are approximate.**

**Discount Water Tanks**  
 32230 Sage Road • Hemet, CA 92544  
 Phone: 800-599-5644  
 E-mail: tanks@discountwatertanks.com  
**www.discountwatertanks.com**

# Guido® Freshwater and Fire Protection Tanks


## Establishing an Emergency Water Supply



### Official Information from the California Department of Forestry and Fire Protection

Maintain an emergency water supply that meets fire department standards through one of the following:

- A community water/hydrant system.
- A cooperative emergency storage tank with neighbors.
- A minimum storage supply of 2,500 gallons on your property.

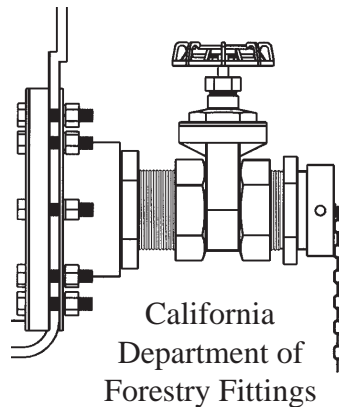

**Free delivery to most areas! - We do all the plumbing!**  
**We will beat any price! - One call saves you lots of money!**

**800-599-5644**

**Fittings and Accessories Installed per your Specifications.**



**Limited Tank Warranty:** RMI warrants to the original purchaser all tanks manufactured by RMI to be free from defects in material and workmanship for a period of five (5) years from date of manufacture, with the exception of D.O.T. and Septic Tanks, which have a special warranty. The Guido Tanks also have a five (5) year warranty. **Review the chemical resistance guide and warranty instruction information prior to the installation and use of RMI Tanks. Hard-plumbing of tank is not recommended due to the expansive/contractive characteristics of Polyethylene. All weights, dimensions, and gallonage markers are approximate.**

**Discount Water Tanks**  
32230 Sage Road • Hemet, CA 92544  
Phone: 800-599-5644  
E-mail: tanks@discountwatertanks.com  
**www.discountwatertanks.com**

**www.discountwatertanks.com**